

BEGA**33 682**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire made of aluminium and hand-blown crystal glass.
For a variety of interior and exterior lighting applications.

Product description

Luminaire made of aluminium and stainless steel
BEGA Unidure® coating technology
Crystal glass with screw neck, white inside
Silicone gasket
2 mounting holes \varnothing 5.5 mm
Distance apart 190 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm, max. 5 G 1.5[□]
Connecting terminal and
earth conductor terminal 2.5[□]
with plug connection
BEGA Ultimate Driver®
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-276 V
DALI controllable
A basic isolation exists between power cable
and control line
BEGA Thermal Control®
Temporary thermal regulation to protect
temperature-sensitive components without
switching off the luminaire
Safety class I
Protection class IP 64
Dust-tight and protection against splash water
Impact strength IK06
Protection against mechanical
impacts < 1 joule
 – Safety mark
 – Conformity mark
Weight: 2.8 kg

Lamp

Module connected wattage	14.2 W
Luminaire connected wattage	16 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 45^\circ\text{C}$


On request we can offer you modifications for
environments with higher temperatures as a
customized product.

33 682 K3

Module designation	LED-0854/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2165 lm
Luminaire luminous flux	1381 lm
Luminaire luminous efficiency	86,3 lm/W

33 682 K4

Module designation	LED-0854/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2165 lm
Luminaire luminous flux	1381 lm
Luminaire luminous efficiency	86,3 lm/W

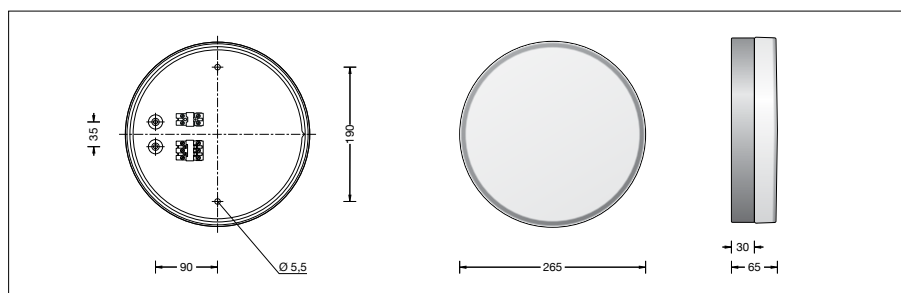

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	193,000 h (L 80 B 50)
	100,000 h (L 90 B 50)

Ambient temperature $t_{a\text{ max}} = 45^\circ\text{C}$ (100 %)

LED psu:	50,000 h
LED module:	57,000 h (L 80 B 50)
	86,000 h (L 70 B 50)

Inrush current

Inrush current: 17 A / 24.2 μs
Maximum number of luminaires of this
type per miniature circuit breaker:

B 10 A:	50 luminaires
B 16 A:	80 luminaires
C 10 A:	50 luminaires
C 16 A:	80 luminaires

Article No. 33 682

LED colour temperature optionally 3000 K
or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Light distribution

