




Floor Lamp | 220-240 V  
1 topLED 6.8 W DC - 8 W AC | CRI 80  
9095

EAC
 CE
 


 C.C.

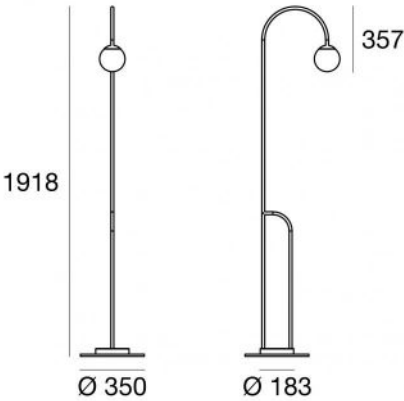

Technical data	
Construction year	2020
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	6.8 W
Source lumens	994 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.3 m
Resin potting	No
Type of light emission	Radial diffusion
Net weight	8,600 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	black RAL 9005
Processing	Coating
Finishing diffuser	
Material	PE
Colour	neutral
Finishing mounting frame	
Material	Iron
Colour	black RAL 9005
Processing	Coating

Floor Lamp | 220-240 V | 1 topLED 6.8 W DC - 8 W AC | CRI 80 | Base 9095

Radial diffusion floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 994 lm, with a 146.2 lm/W nominal luminous efficacy.


The device body is made of iron and features a black ral 9005 finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 8,600 kg.

The total absorbed power is 7 W. The power supply cable is included and features a 2.3 m lenght.

The device features protection class II and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	68 %
Source lumens	994 lm
Delivered lumens	676.49 lm
Consumption	8 W
Luminaire efficacy	84 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L70 B20 C0 72500h	

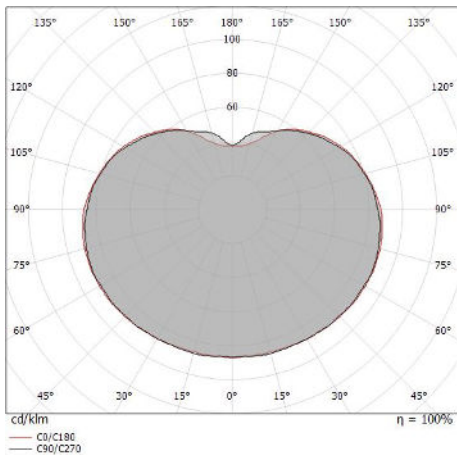



Butler | Floor Lamp | Accessories  
9095



Bracket  
installation position: pole.  
Material:Iron, colour:black, processing:Coating.

Finish	Code
Black	KIT9095