

Dot 600

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 130D01XO00

 Anodised brass
cod. 130D50XO00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 2350 lm
- Emitted flux: 893 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 21 W
- Power absorption: 22 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 6,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
70 x 70 x 24 (cm)
0,17 m³

Gross weight
10 Kg

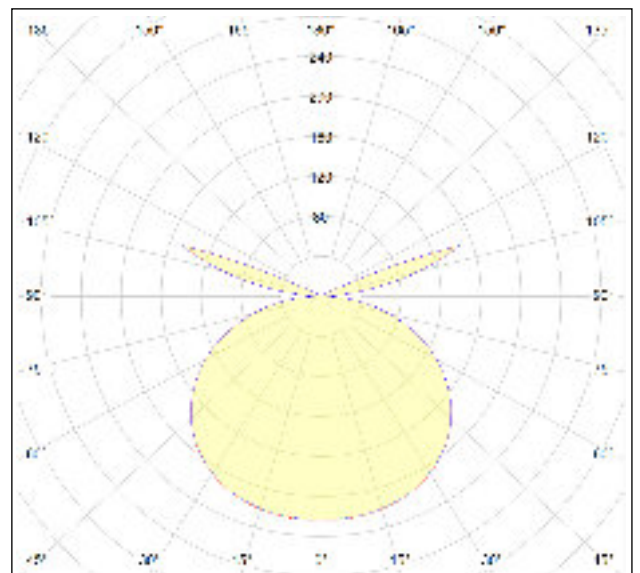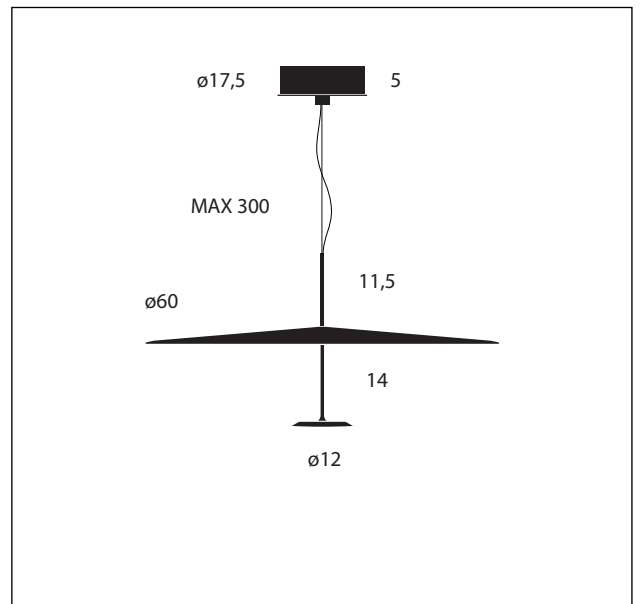

Dot 600

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 130D01XOK27

 Anodised brass
cod. 130D50XOK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 2260 lm
- Emitted flux: 860 lm
- Efficacy: 39 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 21 W
- Power absorption: 22 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 6,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
70 x 70 x 24 (cm)
0,17 m³


Gross weight
10 Kg

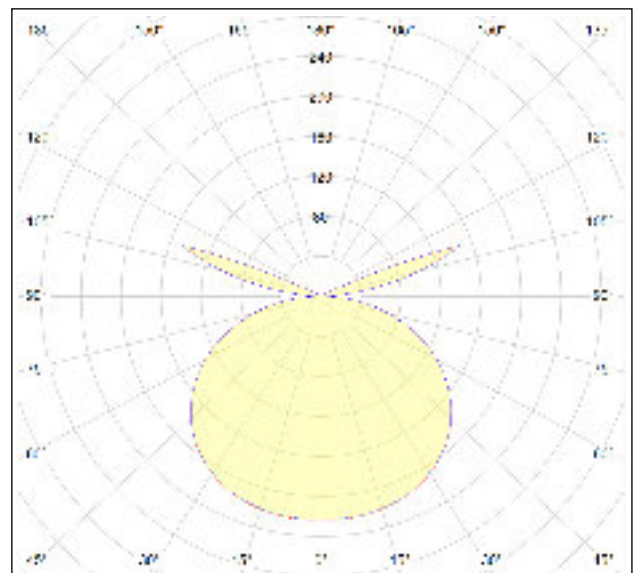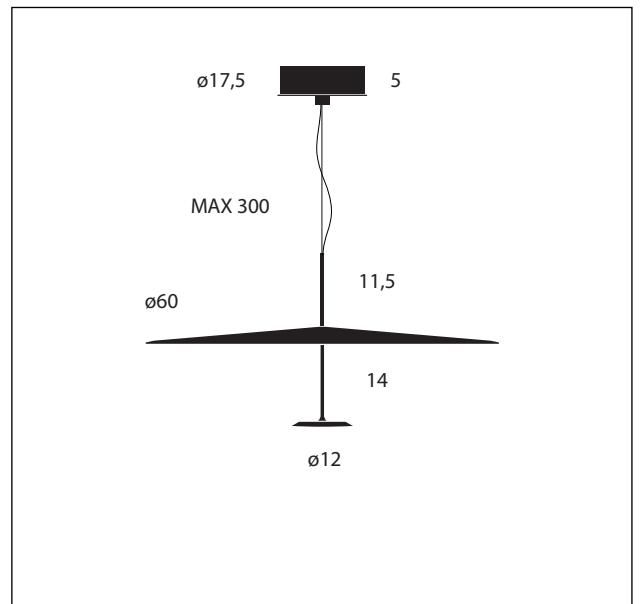

Dot 600

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

● Anodised black
cod. 130D01XO00ETL

● Anodised brass
cod. 130D50XO00ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 2350 lm
- Emitted flux: 893 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 21 W
- Power absorption: 22 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 6,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
70 x 70 x 24 (cm)
0,17 m³

Gross weight
10 Kg

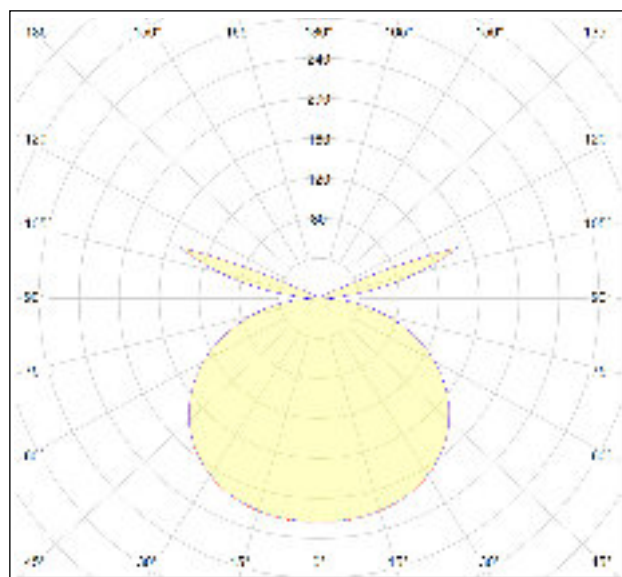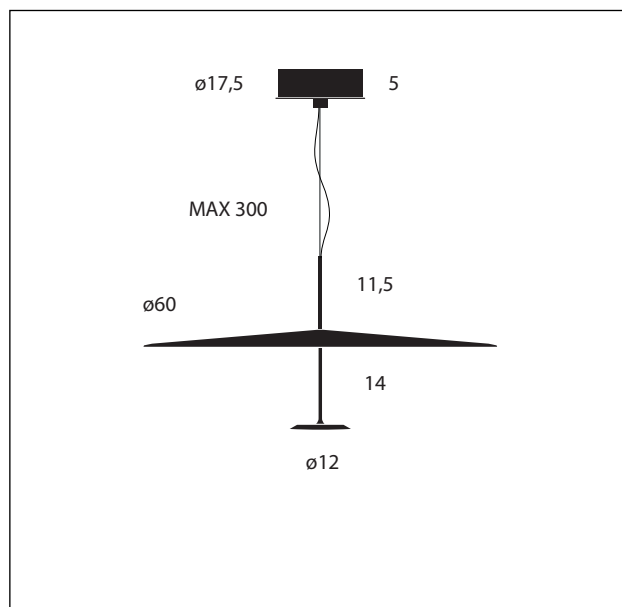

Dot 600

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 130D01XOK27ETL

 Anodised brass
cod. 130D50XOK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 2260 lm
- Emitted flux: 860 lm
- Efficacy: 39 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 21 W
- Power absorption: 22 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 6,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
70 x 70 x 24 (cm)
0,17 m³

Gross weight
10 Kg

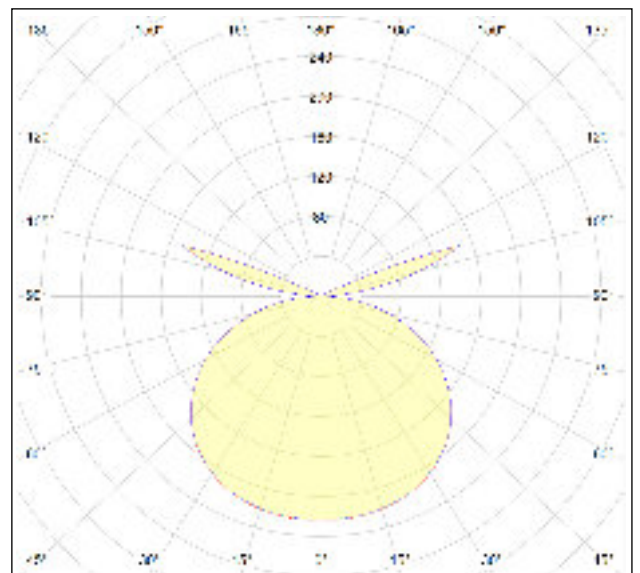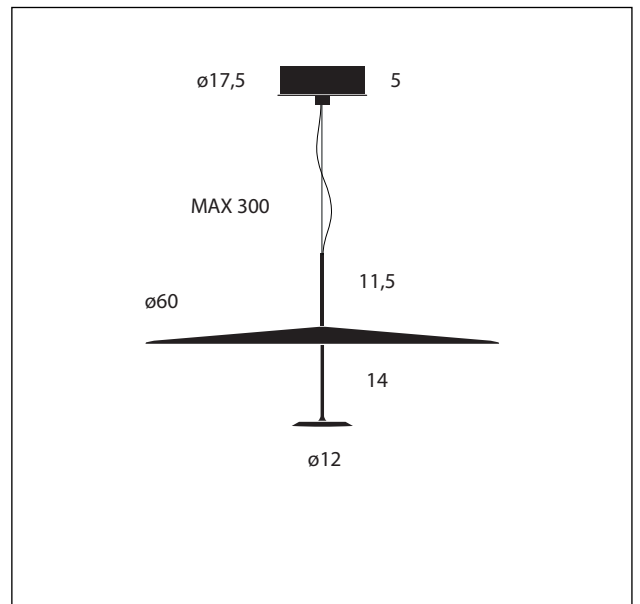



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 131D01XO00

 Anodised brass
cod. 131D50XO00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 3250 lm
- Emitted flux: 1780 lm
- Efficacy: 43 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 39 W
- Power absorption: 41 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 7,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
90 x 90 x 28 (cm)
0,30 m³

Gross weight
18 Kg

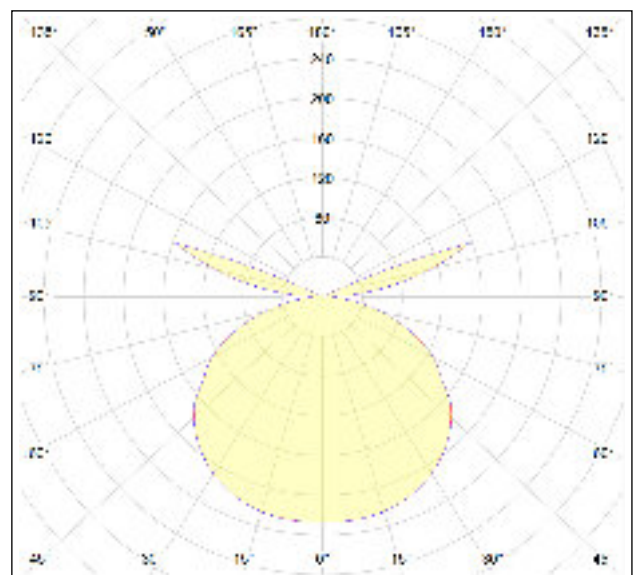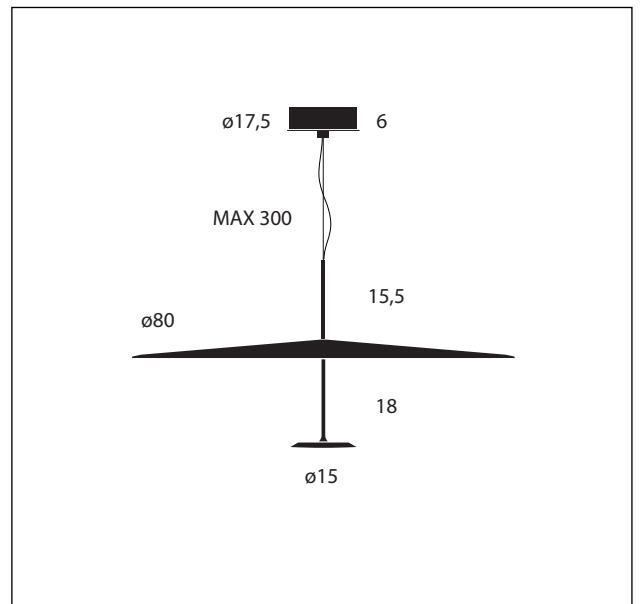

Dot 800

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

Anodised black
cod. 131D01XOK27

Anodised brass
cod. 131D50XOK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 3080 lm
- Emitted flux: 1690 lm
- Efficacy: 41 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 39 W
- Power absorption: 41 W
- Stand-by absorption: < 2 W
- Grid voltage 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 7,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
90 x 90 x 28 (cm)
0,30 m³

Gross weight
18 Kg

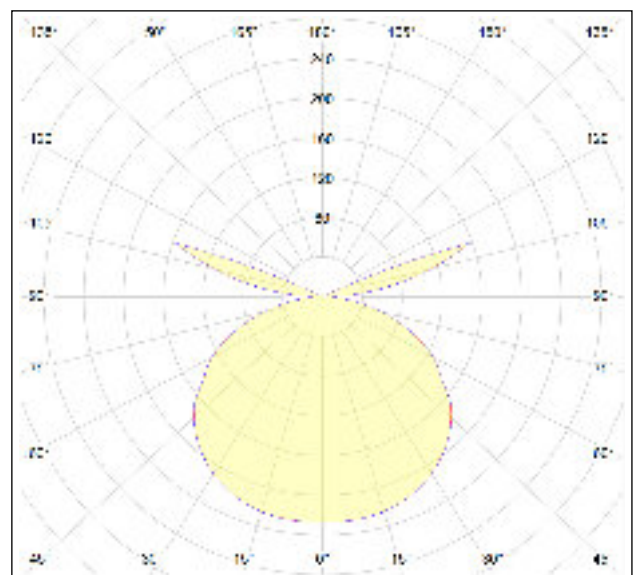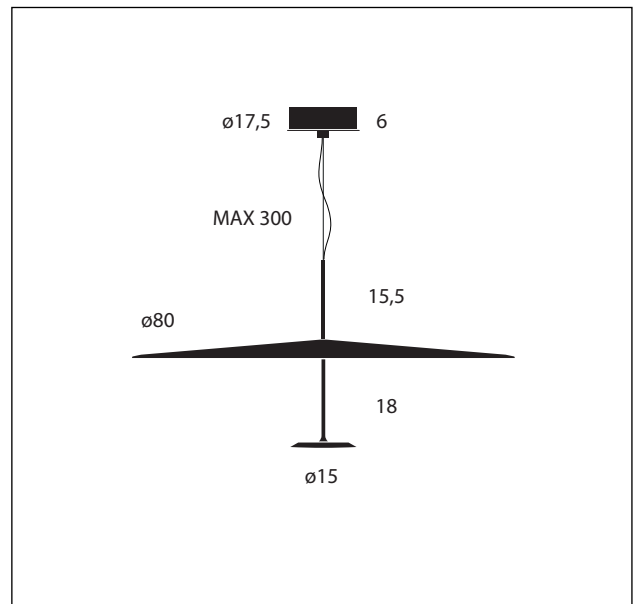

Dot 800

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

Anodised black
cod. 131D01XO00ETL

Anodised brass
cod. 131D50XO00ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 3250 lm
- Emitted flux: 1780 lm
- Efficacy: 43 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 39 W
- Power absorption: 41 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 7,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
90 x 90 x 28 (cm)
0,30 m³

Gross weight
18 Kg

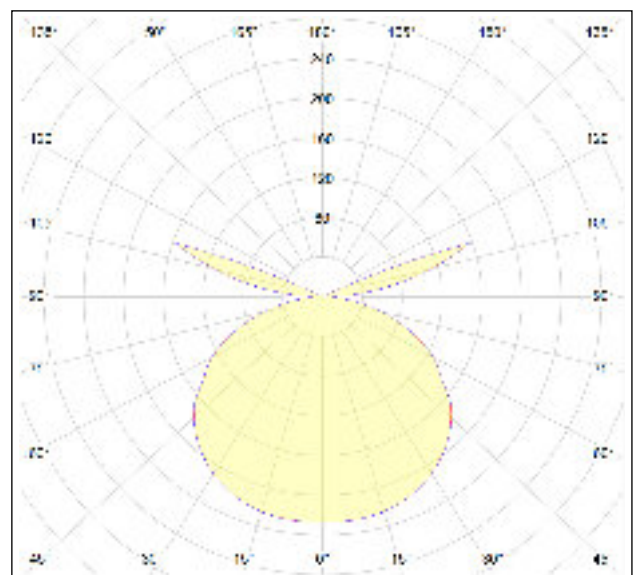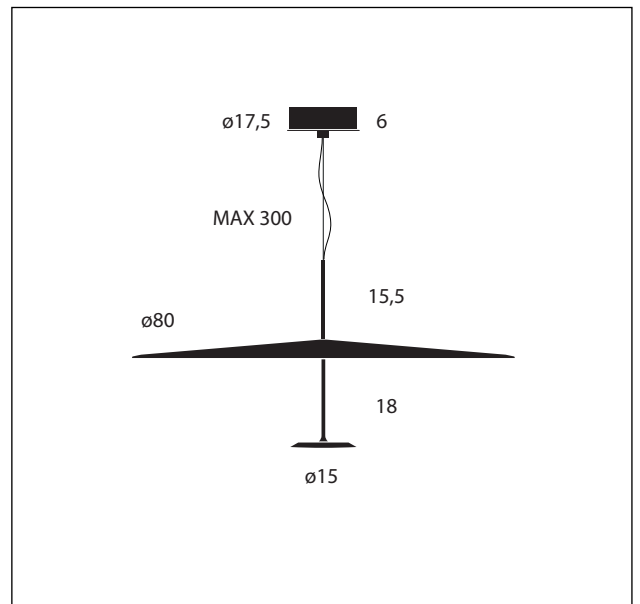

Dot 800

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 131D01XOK27ETL

 Anodised brass
cod. 131D50XOK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 3080 lm
- Emitted flux: 1690 lm
- Efficacy: 41 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 39 W
- Power absorption: 41 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 7,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
90 x 90 x 28 (cm)
0,30 m³

Gross weight
18 Kg

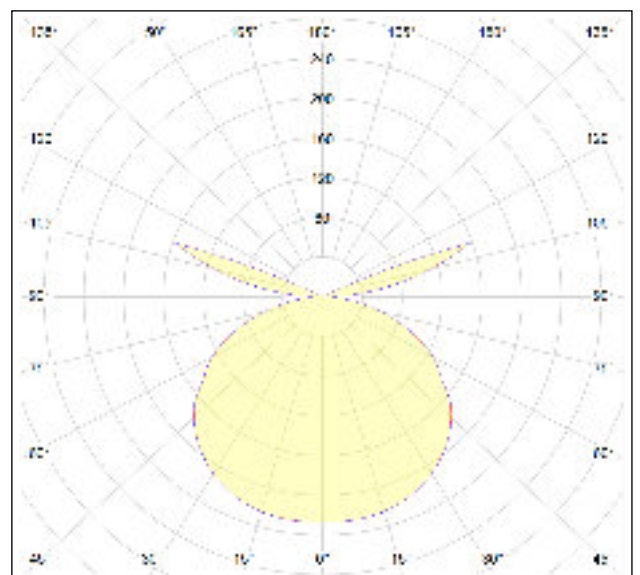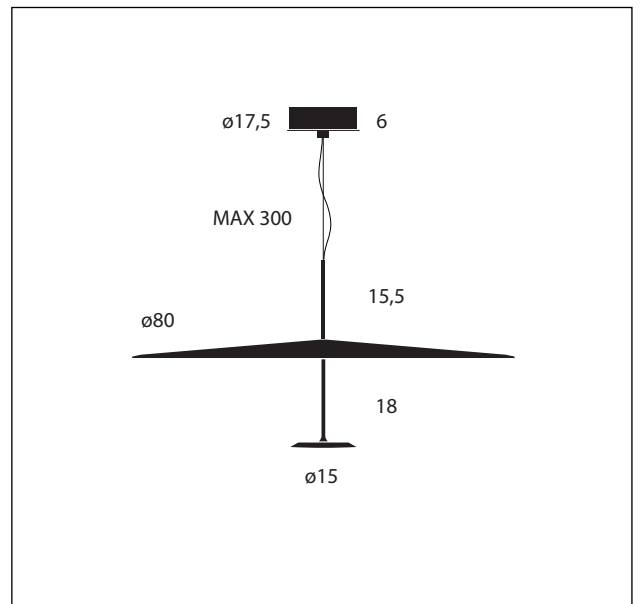

Dot 1100

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 132D01XO00

 Anodised brass
cod. 132D50XO00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4750 lm
- Emitted flux: 2020 lm
- Efficacy: 38 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg

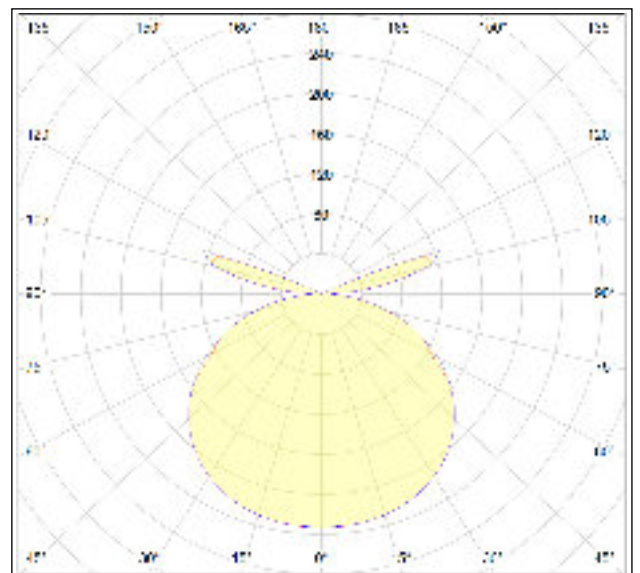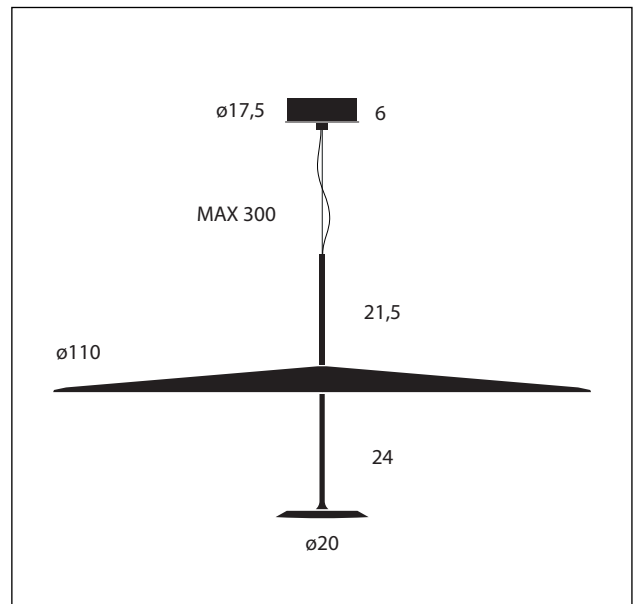

Dot 1100

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming or DALI dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 132D01XOK27

 Anodised brass
cod. 132D50XOK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4570 lm
- Emitted flux: 1950 lm
- Efficacy: 36 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg

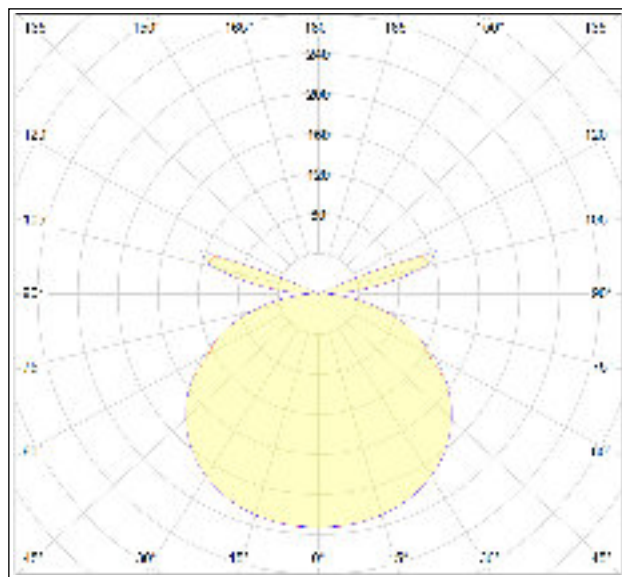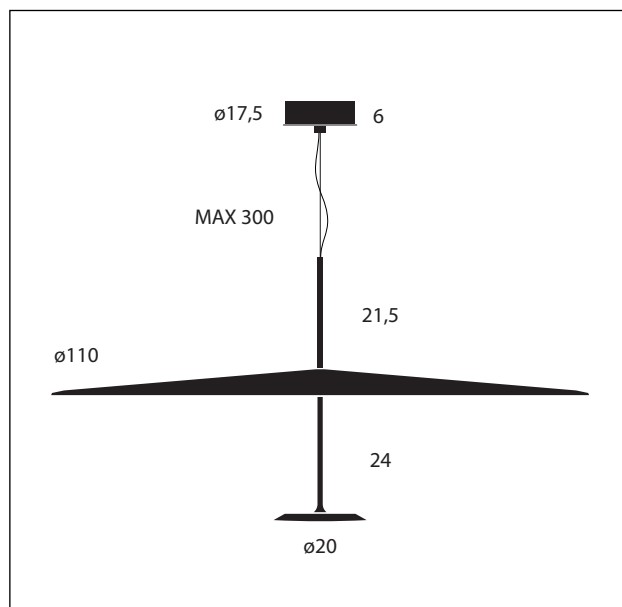

Dot 1100

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 132D01XO00ETL

 Anodised brass
cod. 132D50XO00ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4750 lm
- Emitted flux: 2020 lm
- Efficacy: 38 lm/W
- CCT: 3000K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg

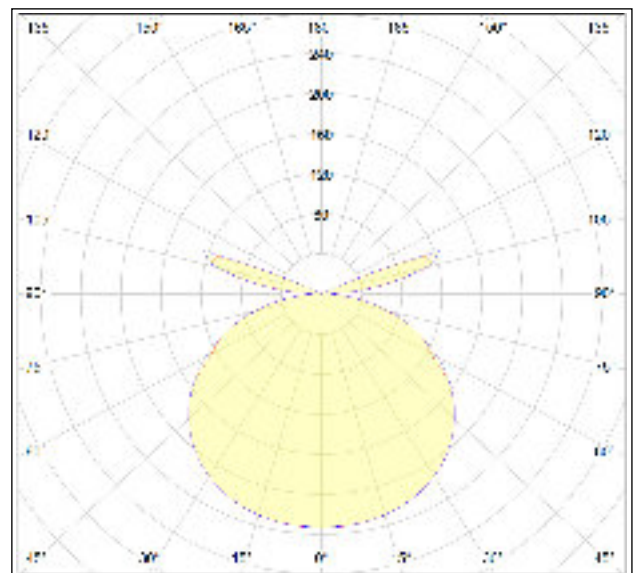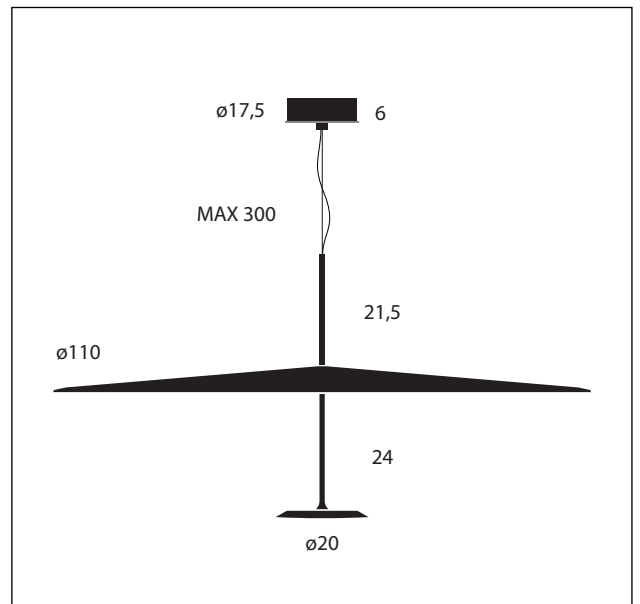

Dot 1100

design Foster + Partners, 2015

release 2019, December



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.

Aluminium structure with steel matt-painted reflector.

1-10V dimming available.

The decentralizing kit is always included.

Finishing

Standard

 Anodised black
cod. 132D01XOK27ETL

 Anodised brass
cod. 132D50XOK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4570 lm
- Emitted flux: 1950 lm
- Efficacy: 36 lm/W
- CCT: 2700K
- CRI index: 83
- Lifetime: >50000h L70 @ 25°C

Electrical Facts

- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V dimmable

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg

