

Elle 1

design Tommaso Cimini, 1984

release 2019, December



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

 Black soft touch
cod. 61L01ST00

 Matt white
cod. 61L02OP00

 Brushed nickel
cod. 61L4400

Special

 Metallic bronze
cod. 61L29MT00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- UGR: < 19
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
211 x 33 x 13 (cm)
0,127 m³

Gross weight
9,3 Kg

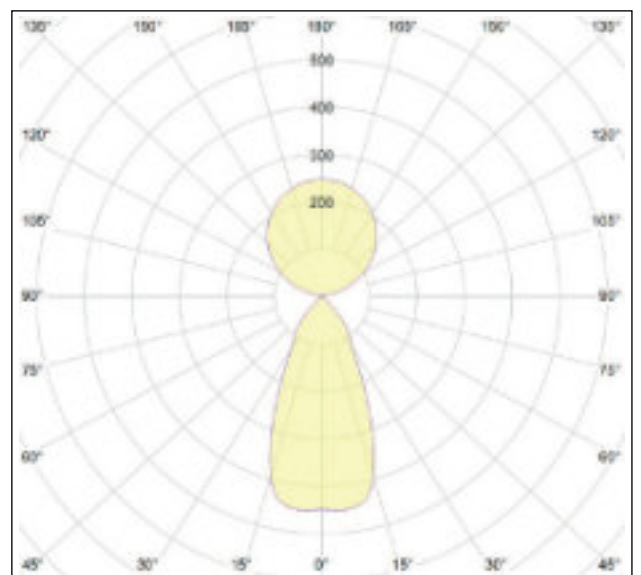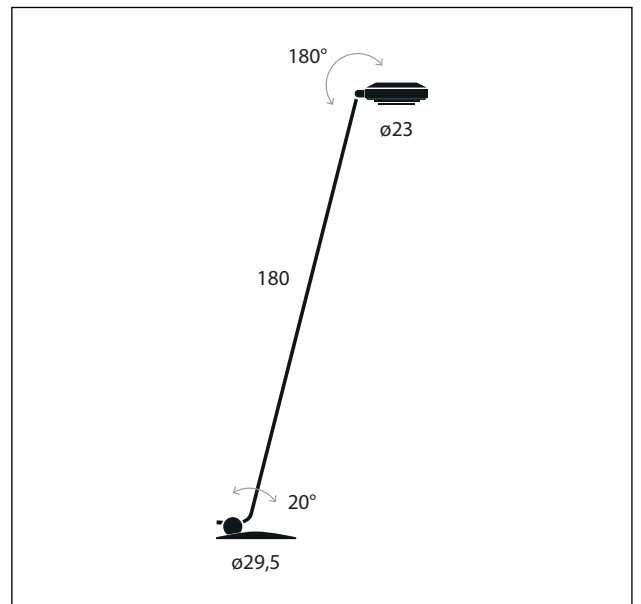



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

 Black soft touch
cod. 61L01STK27

 Matt white
cod. 61L02OPK27

 Brushed nickel
cod. 61L44K27

Special

 Metallic bronze
cod. 61L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3600 lm
- Emitted flux: 2280 lm
- Efficacy: 47,5 lm/W
- UGR: < 19
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
211 x 33 x 13 (cm)
0,127 m³

Gross weight
9,3 Kg

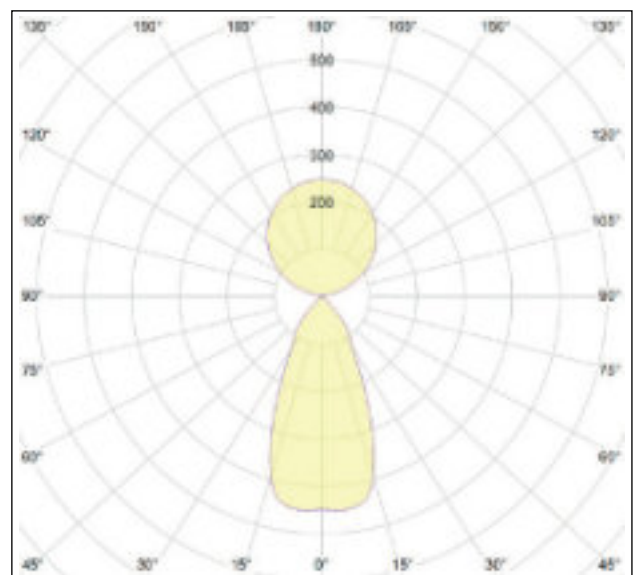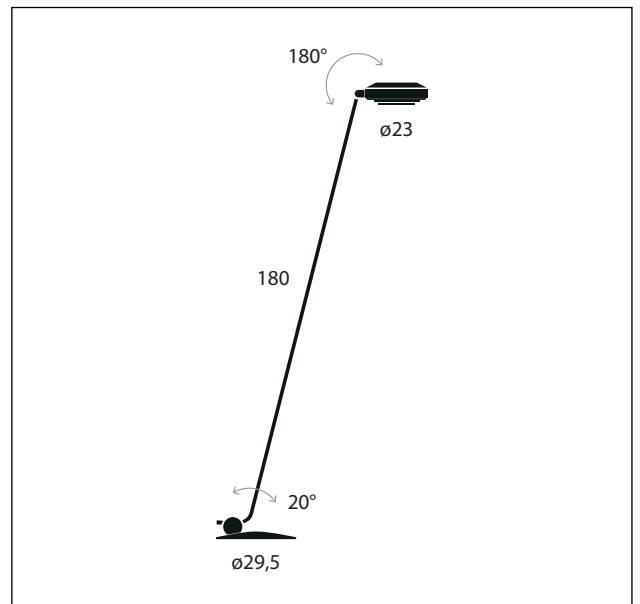



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

Black soft touch
cod. 60L01ST00

Matt white
cod. 60L02OP00

Brushed nickel
cod. 60L4400

Special

Metallic bronze
cod. 60L29MT00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- UGR: < 19
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 14,4 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
211x33x13 + 40x40x10
cm 0,127 m³ + 0,018 m³

Gross weight
5,6 Kg + 13 Kg

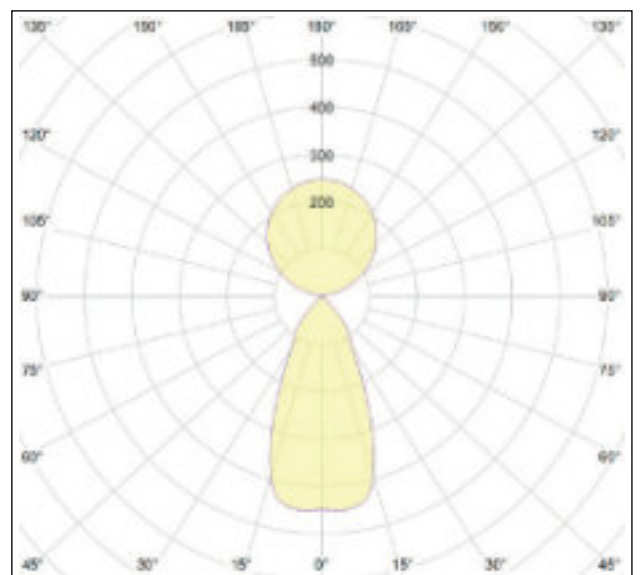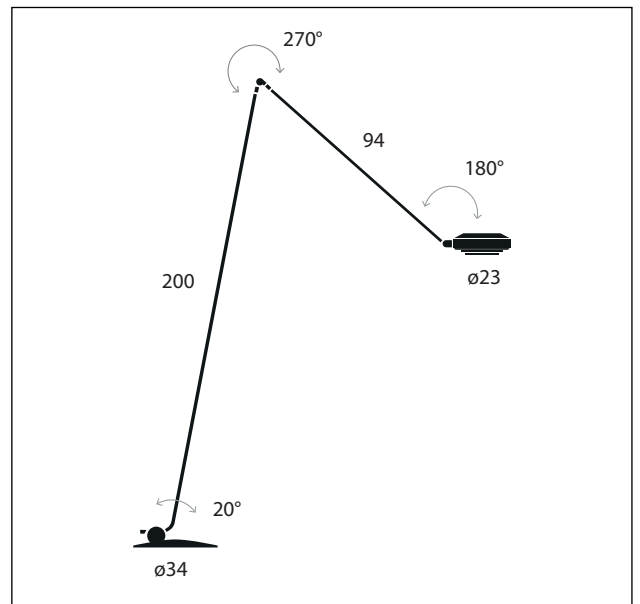



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

-  Black soft touch
cod. 60L01STK27
-  Matt white
cod. 60L02OPK27
-  Brushed nickel
cod. 60L44K27

Special

-  Metallic bronze
cod. 60L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3600 lm
- Emitted flux: 2280 lm
- Efficacy: 47,5 lm/W
- UGR: < 19
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 14,4 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
211x33x13 + 40x40x10
cm 0,127 m³ + 0,018 m³

Gross weight
5,6 Kg + 13 Kg

