


Flo Desk

design Foster + Partners, 2011

release 2019, December



LED light for desk, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 94001ST00

○ Matt white
cod. 94002OP00

● Brushed nickel
cod. 9404400

Special

● Matt red
cod. 94003OP00

● Matt yellow
cod. 94005OP00

● Metallic bronze
cod. 94029MT00

● Gunmetal
cod. 9403200

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++


Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
54 x 46 x 8 (cm)
0,018 m³

Gross weight
2,6 Kg

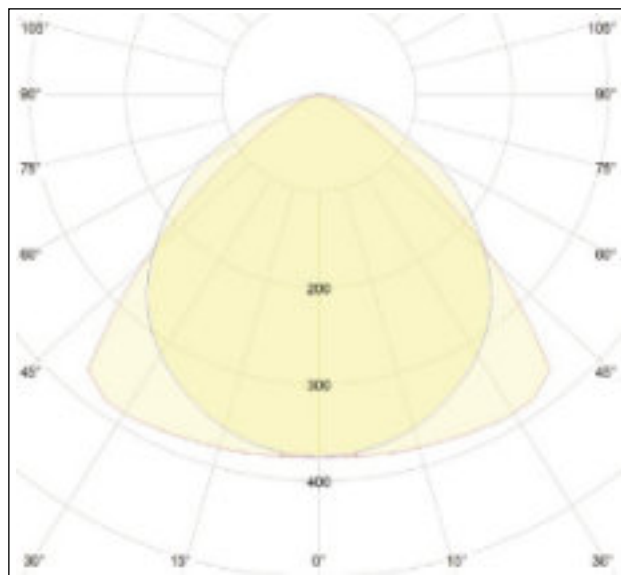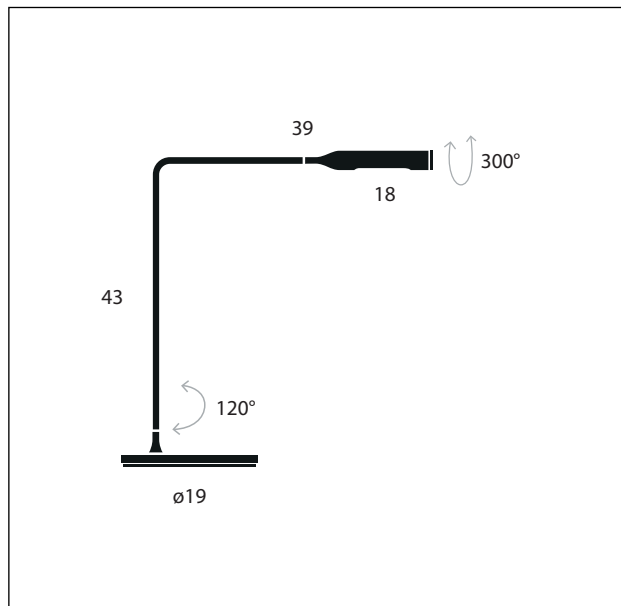



LED light for desk, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 94001STK27

○ Matt white
cod. 94002OPK27

● Brushed nickel
cod. 94044K27

Special

● Matt red
cod. 94003OPK27

● Matt yellow
cod. 94005OPK27

● Metallic bronze
cod. 94029MTK27

● Gunmetal
cod. 94032K27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
54 x 46 x 8 (cm)
0,018 m³


Gross weight
2,6 Kg

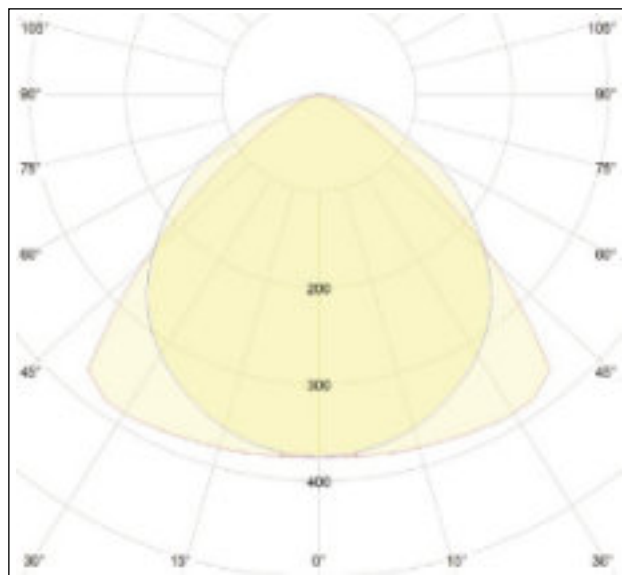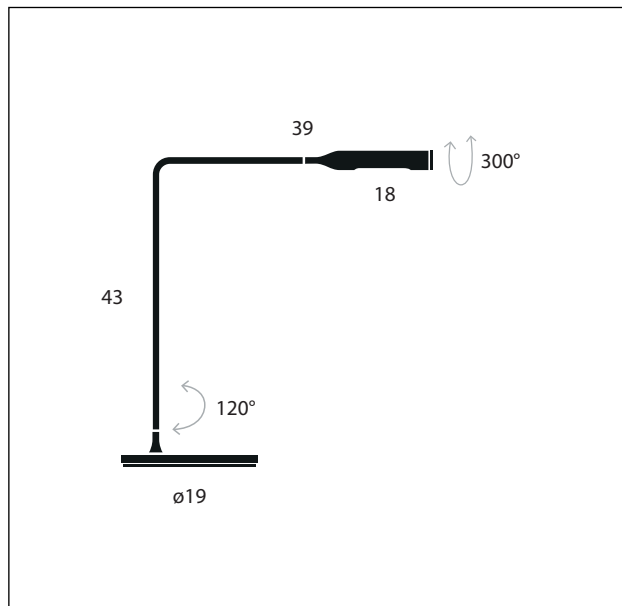

Flo Desk

design Foster + Partners, 2011

release 2019, December



LED light for desk, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

 Black soft touch
cod. 94001ST00ETL

 Matt white
cod. 94002OP00ETL

 Brushed nickel
cod. 9404400ETL

Special

 Matt red
cod. 94003OP00ETL

 Matt yellow
cod. 94005OP00ETL

 Metallic bronze
cod. 94029MT00ETL

 Gunmetal
cod. 9403200ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++


Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
54 x 46 x 8 (cm)
0,018 m³

Gross weight
2,6 Kg

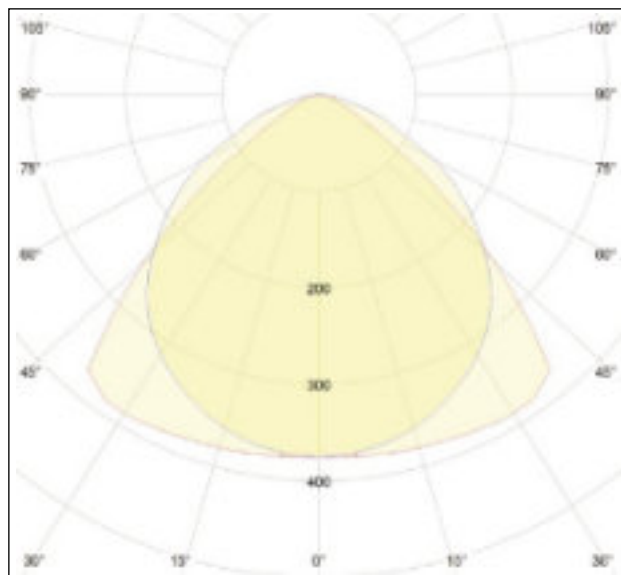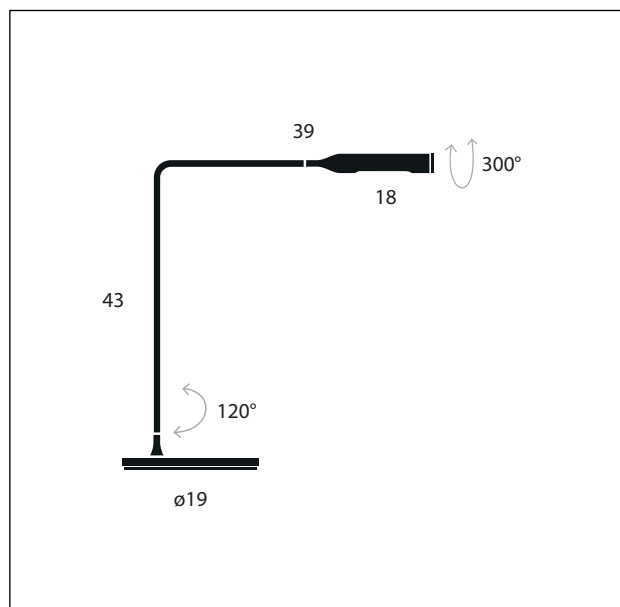



LED light for desk, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

 Black soft touch
cod. 94001STK27ETL

 Matt white
cod. 94002OPK27ETL

 Brushed nickel
cod. 94044K27ETL

Special

 Matt red
cod. 94003OPK27ETL

 Matt yellow
cod. 94005OPK27ETL

 Metallic bronze
cod. 94029MTK27ETL

 Gunmetal
cod. 94032K27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
54 x 46 x 8 (cm)
0,018 m³

Gross weight
2,6 Kg

