


Flo Lounge

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 97101ST00

○ Matt white
cod. 97102OP00

● Brushed nickel
cod. 9714400

Special

● Matt red
cod. 97103OP00

● Matt yellow
cod. 97105OP00

● Metallic bronze
cod. 97129MT00

● Gunmetal
cod. 9713200

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 270 lm
- Emitted flux: 150 lm
- Efficacy: 30 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

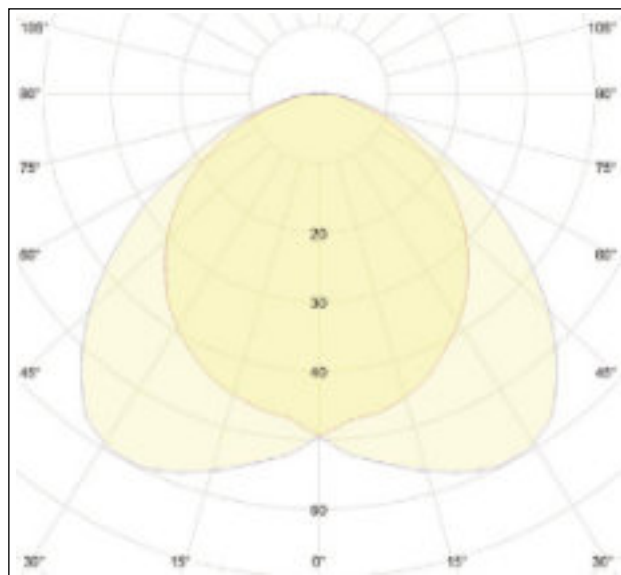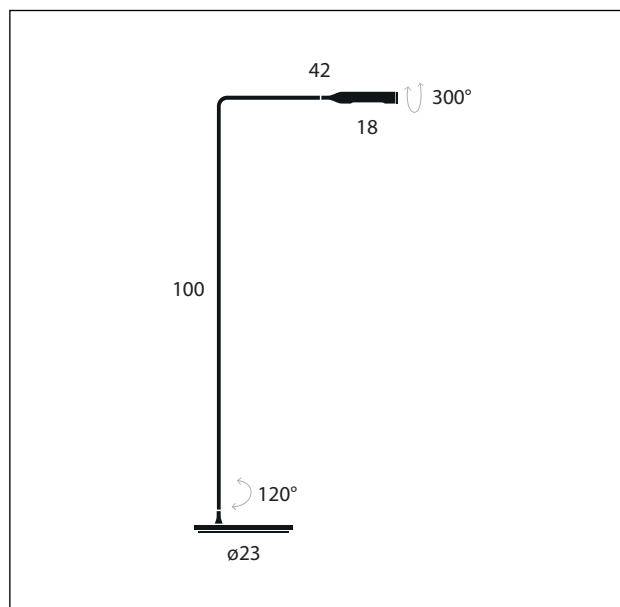

Flo Lounge

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 97101STK27

○ Matt white
cod. 97102OPK27

● Brushed nickel
cod. 97144K27

Special

● Matt red
cod. 97103OPK27

● Matt yellow
cod. 97105OPK27

● Metallic bronze
cod. 97129MTK27

● Gunmetal
cod. 97132K27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 250 lm
- Emitted flux: 140 lm
- Efficacy: 28 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

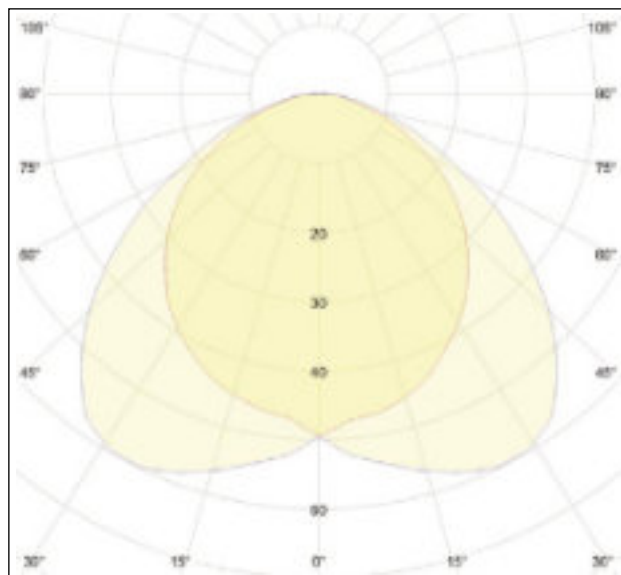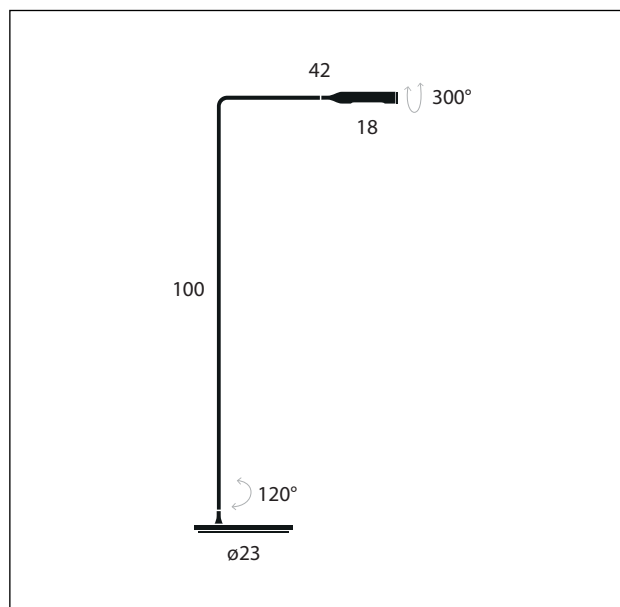

Flo Lounge

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 97101ST00ETL

○ Matt white
cod. 97102OP00ETL

● Brushed nickel
cod. 9714400ETL

Special

● Matt red
cod. 97103OP00ETL

● Matt yellow
cod. 97105OP00ETL

● Metallic bronze
cod. 97129MT00ETL

● Gunmetal
cod. 9713200ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 270 lm
- Emitted flux: 150 lm
- Efficacy: 30 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

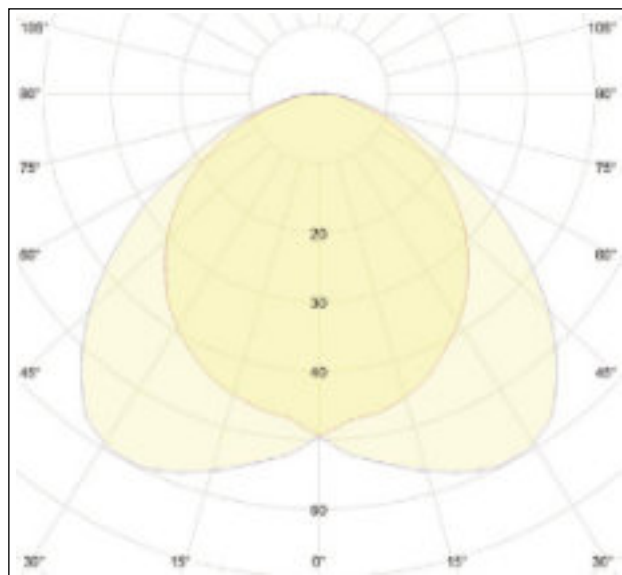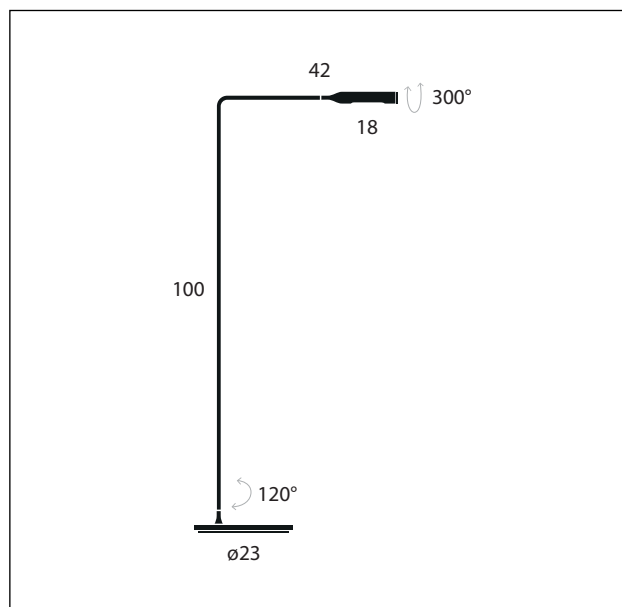

Flo Lounge

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 97101STK27ETL

○ Matt white
cod. 97102OPK27ETL

● Brushed nickel
cod. 97144K27ETL

Special

● Matt red
cod. 97103OPK27ETL

● Matt yellow
cod. 97105OPK27ETL

● Metallic bronze
cod. 97129MTK27ETL

● Gunmetal
cod. 97132K27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 250 lm
- Emitted flux: 140 lm
- Efficacy: 28 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 3 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

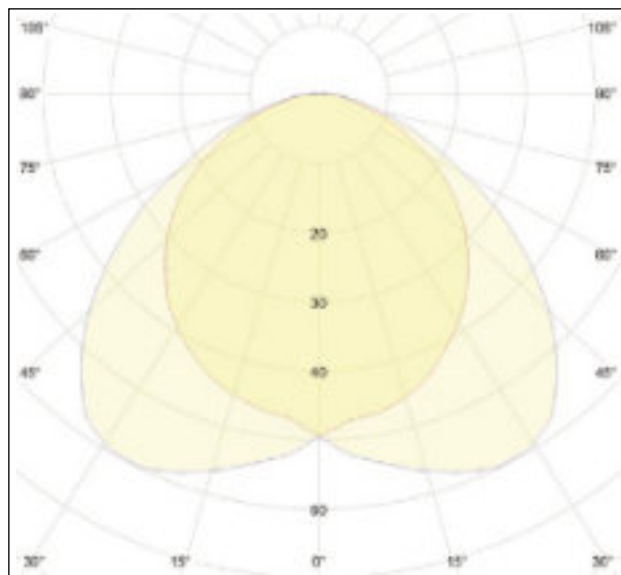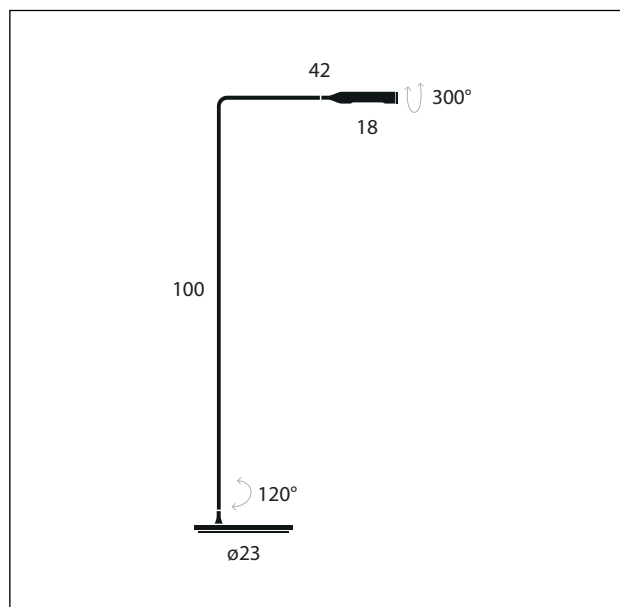

Flo Floor

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 94501ST00

○ Matt white
cod. 94502OP00

● Brushed nickel
cod. 9454400

Special

● Matt red
cod. 94503OP00

● Matt yellow
cod. 94505OP00

● Metallic bronze
cod. 94529MT00

● Gunmetal
cod. 9453200

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

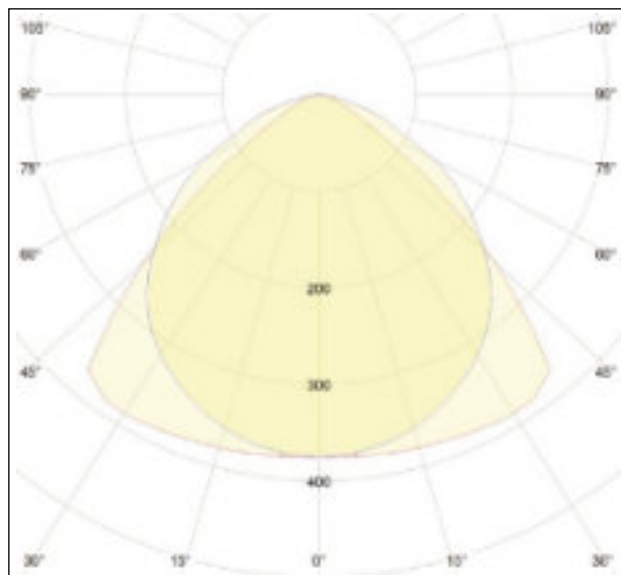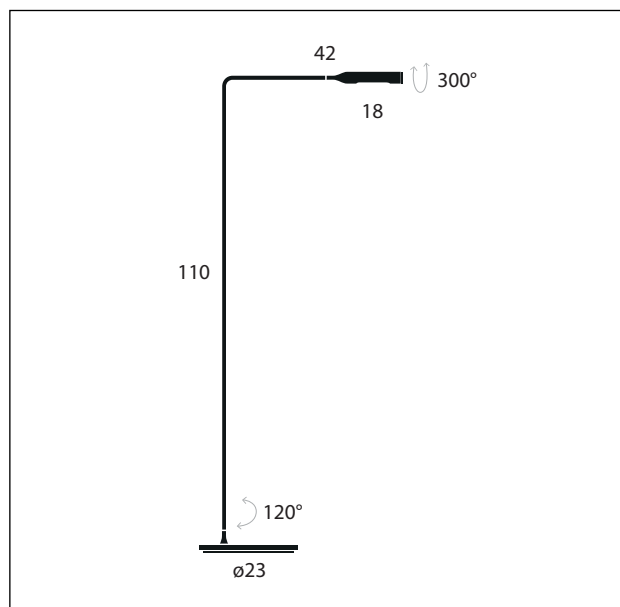

Flo Floor

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 94501STK27

○ Matt white
cod. 94502OPK27

● Brushed nickel
cod. 94544K27

Special

● Matt red
cod. 94503OPK27

● Matt yellow
cod. 94505OPK27

● Metallic bronze
cod. 94529MTK27

● Gunmetal
cod. 94532K27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

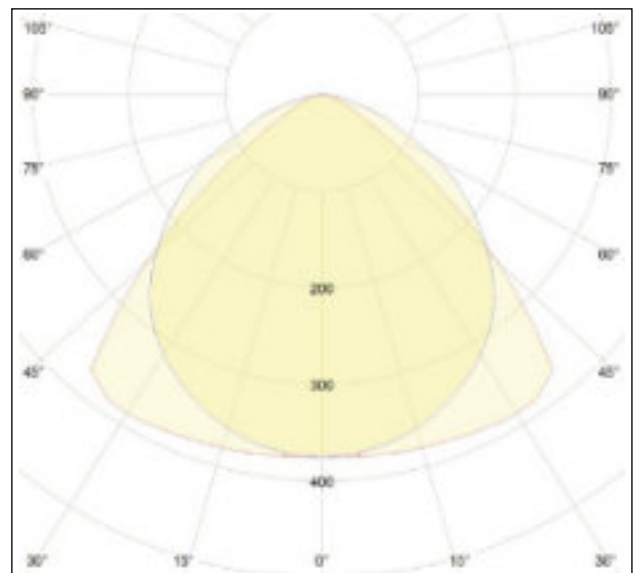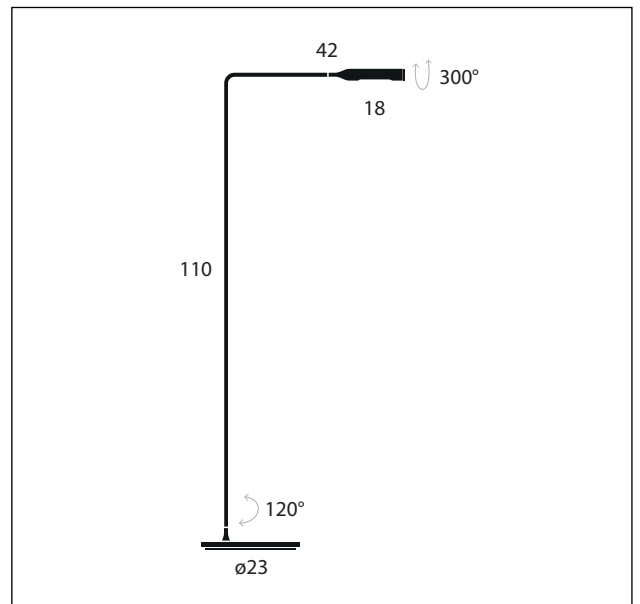

Flo Floor

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

 Black soft touch
cod. 94501ST00ETL

 Matt white
cod. 94502OP00ETL

 Brushed nickel
cod. 9454400ETL

Special

 Matt red
cod. 94503OP00ETL

 Matt yellow
cod. 94505OP00ETL

 Metallic bronze
cod. 94529MT00ETL

 Gunmetal
cod. 9453200ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³


Gross weight
4,8 Kg

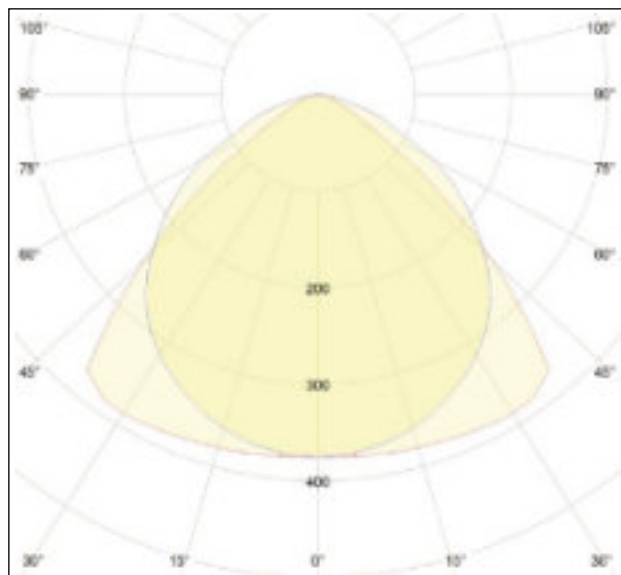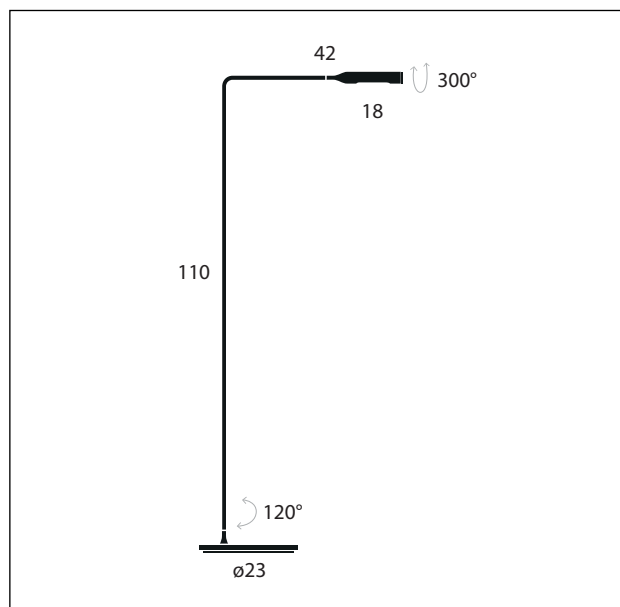

Flo Floor

design Foster + Partners, 2011

release 2019, December



LED light for floor, in varnish coated aluminium and steel.
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 94501STK27ETL

○ Matt white
cod. 94502OPK27ETL

● Brushed nickel
cod. 94544K27ETL

Special

● Matt red
cod. 94503OPK27ETL

● Matt yellow
cod. 94505OPK27ETL

● Metallic bronze
cod. 94529MTK27ETL

● Gunmetal
cod. 94532K27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 2,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
123 x 56 x 8 (cm)
0,053 m³

Gross weight
4,8 Kg

