


Limbus D

design Emanuele Ricci, 2019

release 2019, December



Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.
The metal parts are made in lathed aluminium.
1-10V dimming or DALI dimming available.

Finishing

Standard

 Anodised black
cod. 190D01XO00

 Anodised brass
cod. 190D50XO00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 233 lm
- Efficacy: 39 lm/W:
- CCT: 3000K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
3,5 Kg

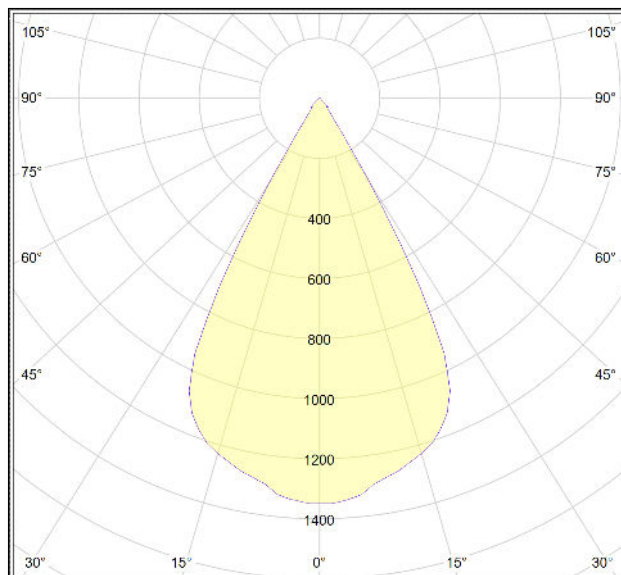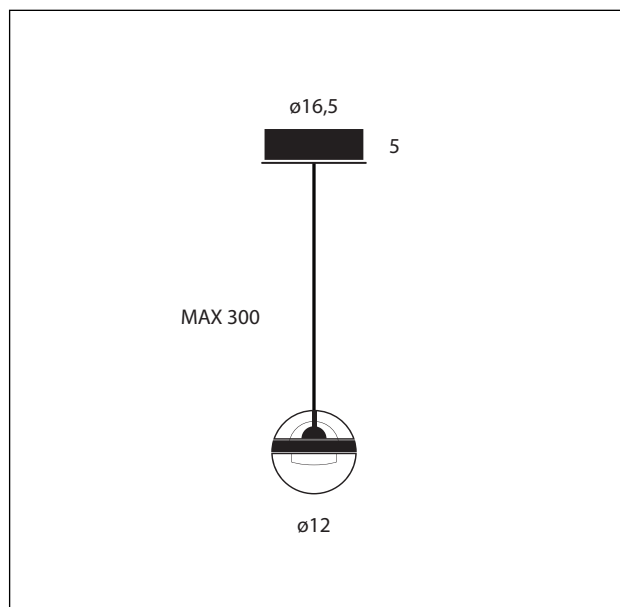


Limbus D



design Emanuele Ricci, 2019

release 2019, December



Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.
The metal parts are made in lathed aluminium.
1-10V dimming or DALI dimming available.

Finishing

Standard

 Anodised black
cod. 190D01XOK27

 Anodised brass
cod. 190D50XOK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 330 lm
- Emitted flux: 221 lm
- Efficacy: 37 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 4 W
- Power absorbtion: 5 W
- Stand-by absorbtion: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++


Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
3,5 Kg

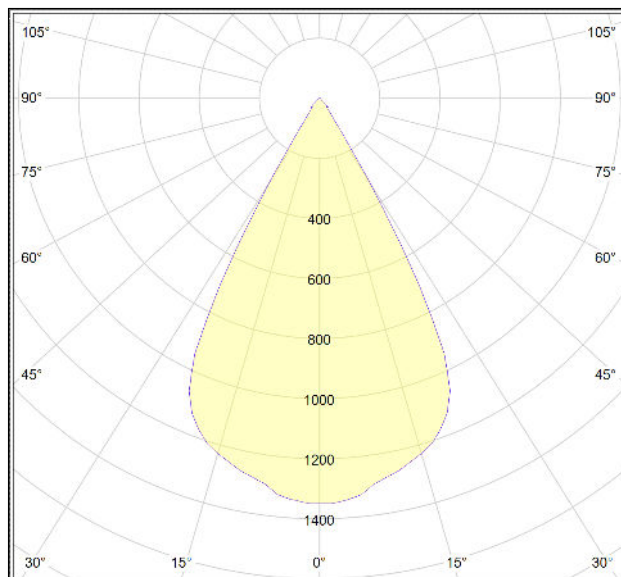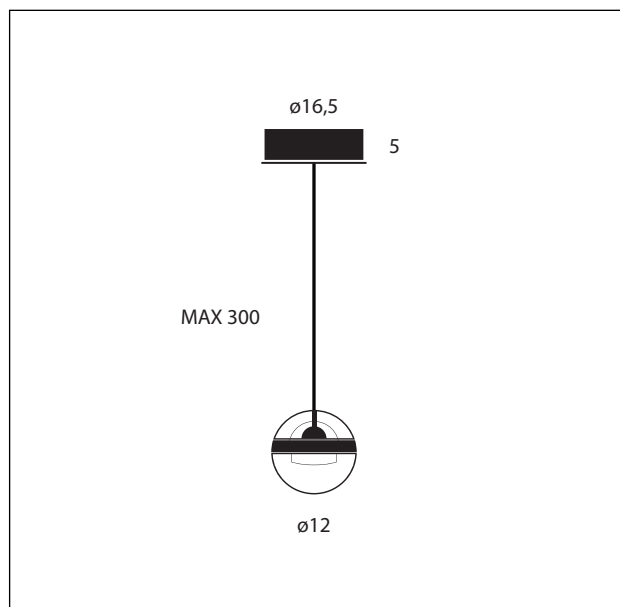



Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.
The metal parts are made in lathed aluminium
1-10V dimming or DALI dimming compatible (AC-DC converter required)

Finishing

Standard

 Anodised black
cod. 190M01XO00

 Anodised brass
cod. 190M50XO00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 233 lm
- Efficacy: 39 lm/W:
- CCT: 3000K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
2,7 Kg

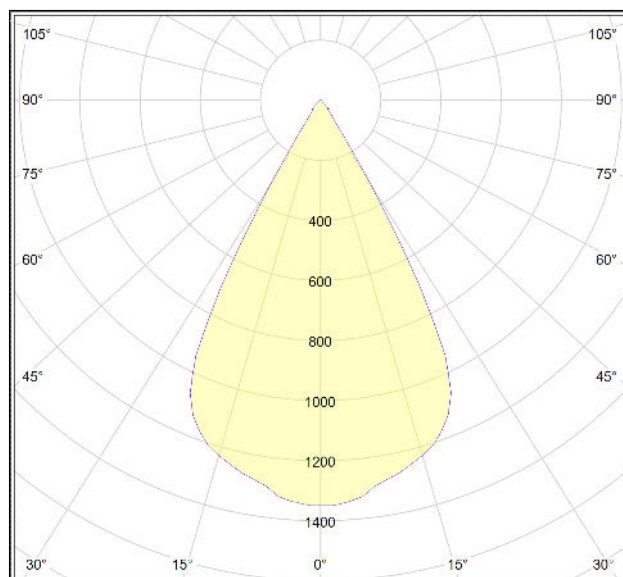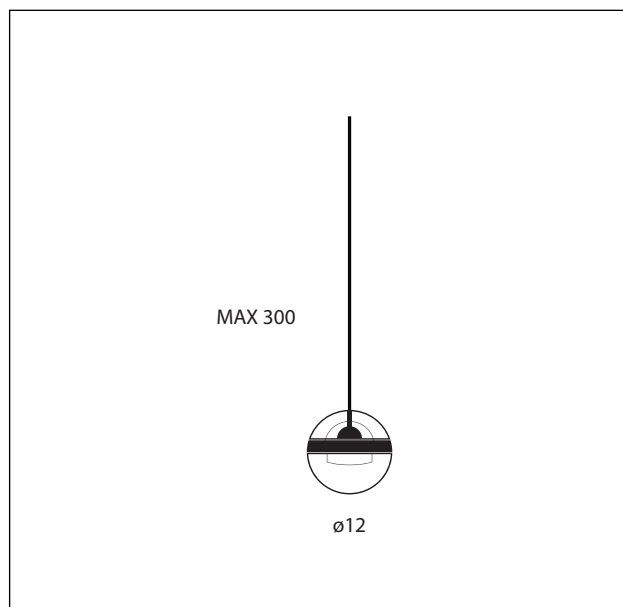



Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.
The metal parts are made in lathed aluminium
1-10V dimming or DALI dimming compatible (AC-DC converter required)

Finishing

Standard

 Anodised black
cod. 190M01XOK27

 Anodised brass
cod. 190M50XOK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 221 lm
- Efficacy: 37 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
21 x 21 x 27 (cm)
0,012 m³

Gross weight
2,7 Kg

