

ILLAN

Design Zsuzsanna Horvath

**LUCE
PLAN**

Type: Suspension

Lamps:

Ø 60: LED 25W @ 2700K, CRI 90	EEL: A+
dimnable phase cut or push/DALI	1.437 lm
Ø 80: LED 32W @ 2700K, CRI 90	EEL: A+
dimnable phase cut or push/DALI	1.603 lm
Ø 100: LED 40W @ 2700K, CRI 90	EEL: A+
dimnable phase cut or push/DALI	2.052 lm

Product use: Indoor

Materials: Extra flexible plywood

Colors: Birch

Description: The decorative character of the lamp is emphasized by an original choice of materials: with its ethereal design, the piece is composed of a very light body obtained from laser-cut plywood featuring equidistant lines, suspended from the ceiling. Illan is available in three dimensions.

Insulation class: 

Reference code:

Structure Ø 60 cm	
D82S1 1D82YS100099	dimnable phase cut
D82S1D 1D82YS1D0099	dimnable push/DALI
weight: 1,8 Kg	
Structure Ø 80 cm	
D82S2 1D82YS200099	dimnable phase cut
D82S2D 1D82YS2D0099	dimnable push/DALI
weight: 2,4 Kg	
Structure Ø 100 cm	
D82S3 1D82YS300099	dimnable phase cut
D82S3D 1D82YS3D0099	dimnable push/DALI
weight: 3,2 Kg	

Note

The product is not suitable for damp locations.



www.luceplan.com



Certification:



The mark of
responsible forestry



D82S

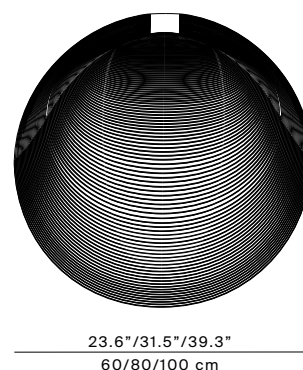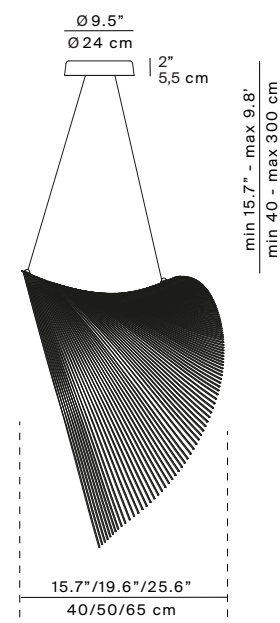

DIMMER LIST

for dimmable phase cut version

Brand	Model number (Dimmer)	Dimming Range	Leading/ Trailing edge
ELKO	315GLE	7-100%	Trailing edge
Schneider	SBD315RC	10-100%	Trailing edge
Lutron	RISU-452	8-100%	Trailing edge
Lutron	LLSI-502	15-100%	Leading edge
CLIPSAL	32E450TM	15-100%	Trailing edge
CLIPSAL	32E450LM	18-100%	Leading edge
JUNG	243EX	18-100%	Trailing edge
BerKer	2875	0-100%	Leading edge
Asialink	8082	17-100%	Leading edge
DOYLE&TRATT	P500	17-100%	Leading edge
SIEMENS	400W	30-100%	Leading edge
VADSBO	LD220	1-100%	Trailing edge
MALMBERGS	HD2200	10-100%	Trailing edge
Eltako	EUD61NPN-UC	0-100%	Trailing edge
Eltako	EUD12NPN-UC	0-100%	Trailing edge